



GOLD MEDAL®

32 oz. Pop-O-Gold (Counter, Base Models)

Model No. 2011-00-841 (842) and 2011-00-801 (802 803 804) POG


Specifications





2011 (841) Counter Model



2011 (801) Model
with Base included.



Allow 6" (15.3 cm) Min. Clearance for Airflow

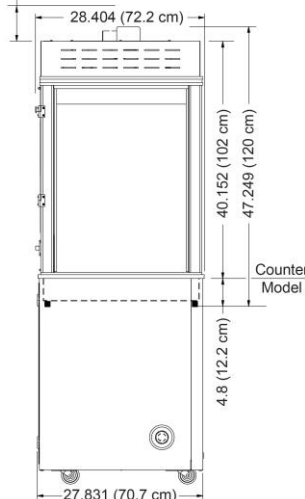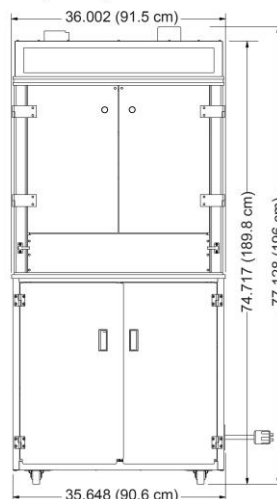

Counter
Model

General images shown for reference—Base included in select Models only.

Overall Dimensions:

Width: 36" (91.5 cm)

Depth: 28.404" (72.2 cm)

Height: 77.128" (196 cm), includes base

See drawing above for additional dimensions and clearances required.
See 2009SS Spec Sheet for base details.

Electrical - Domestic

120/208 OR 120/240V

5752 WATTS 60 Hz

(NEMA L14-30P) Plug

Unit designed to operate on single phase, 30 AMP, 4 wire supply (2 Hot, 1 Neutral, 1 Ground). Wall receptacle supplied with unit.

Model Description:

2011 (841): Counter Model (no base); oil capable (oil unit sold separately); LED backlit sign.

2011 (842): Counter Model (no base); oil capable (oil unit sold separately); LED neon sign.

2011 (801): Base and BIB included; LED backlit sign.

2011 (802): Base and BIB included; LED neon sign.

2011 (803): Base and Bucket Pump included; LED backlit sign.

2011 (804): Base and Bucket Pump included; LED neon sign.

Unit Features:

- 32 oz. top hat kettle.
- 3-Stage Filtration System.
- Rocker switch controls; Salt/Sweet capability included (FlexiPop® not available); electronic temperature control.
- Popcorn Crisper; both Butterfly and Mushroom Corn Screen Inserts included.
- Stainless steel reversible dome (for sign on front counter or back counter); welded extrusion frame.
- **Base 2009SS** (if equipped), SS w/casters; see Spec Sheet.

Oil Delivery System: Unit equipped with provisions for a dual timer oil unit, sold separately (included with select models only). Use either 2257 (206) BIB or 2114 (206) Bucket Pump System.

Option: (sold separately)

Single Fan Hood Control (Item 55162) - External vent hood delay circuit—popper has a timed control circuit to permit an external exhaust hood to run for up to 20 min. after kettle is turned off.

Plug Type: Agency Approvals:



NEMA L14-30P



Intertek



Intertek



Gold Medal Products Co.

10700 Medallion Drive, Cincinnati, OH 45241

Ph: (513) 769-7676, (800) 543-0862; Fax: (513) 769-8500

gmpopcorn.com info@gmpopcorn.com